


## SOCKET CONNECTOR DIN 72585


### Specifications

Contact	= NC
Thread	= G 1/2
Order code	= <b>021416001</b>
Nominal operating voltage	= 12V - 24V
Not suitable for use in pressurised	
Socket connector	= IP64K and IPX9K

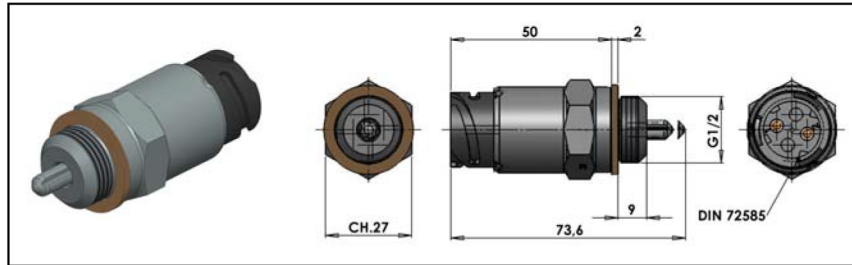


### Specifications

Contact	= NO
Thread	= M14
Order code	= <b>021416000</b>
Nominal operating voltage	= 12V - 24V
Not suitable for use in pressurised	
Socket connector	= IP64K and IPX9K

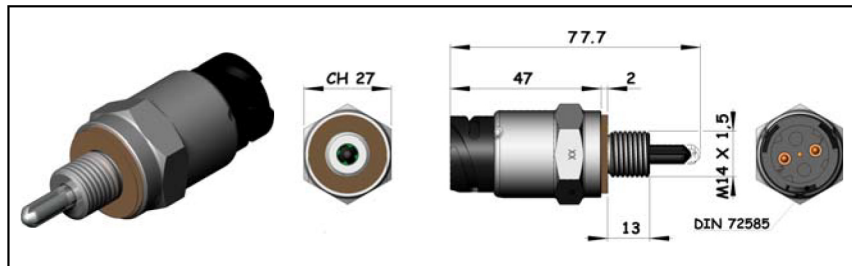


### Specifications

Contact	= NO
Thread	= M14
Order code	= <b>021416006</b>
Nominal operating voltage	= 12V - 24V
Not suitable for use in pressurised	
Socket connector	= IP64K and IPX9K

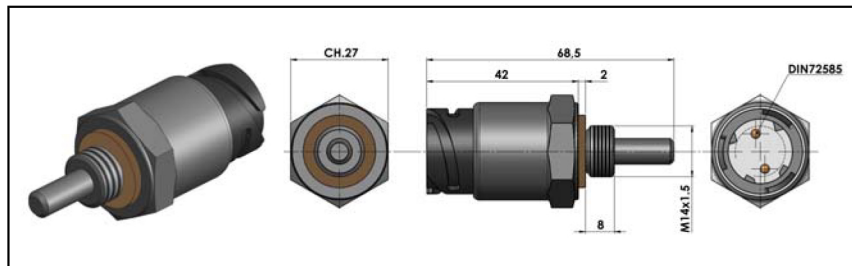


### Specifications

Contact	= NC
Thread	= M16
Order code	= <b>021416002</b>
Nominal operating voltage	= 12V - 24V
Not suitable for use in pressurised	
Socket connector	= IP64K and IPX9K

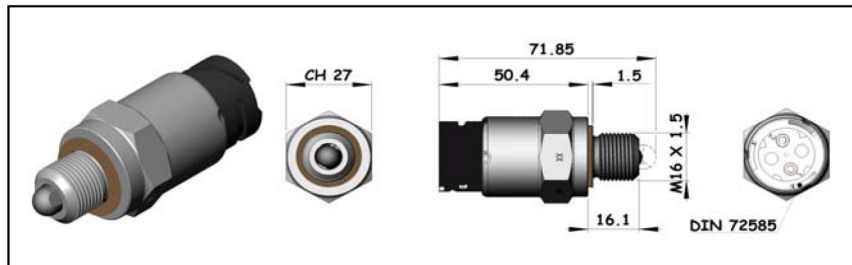

### Specifications

Contact	= NC
Thread	= M14
Order code	= <b>021416004</b>
Nominal operating voltage	= 12V - 24V
Not suitable for use in pressurised	
Socket connector	= IP64K and IPX9K

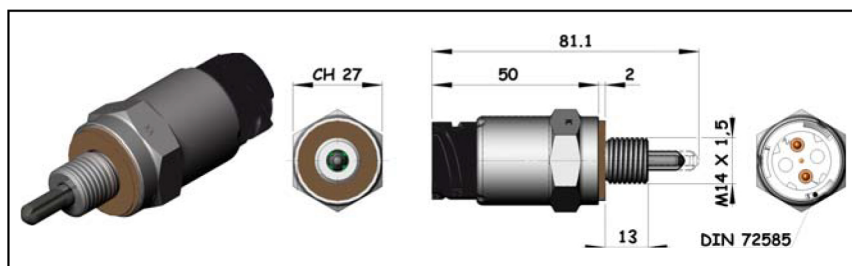

## SOCKET CONNECTOR PACKARD

### Specifications

Contact	= NO
Thread	= M14
Order code	= <b>021416005</b>
Nominal operating voltage	= 12V - 24V
Not suitable for use in pressurised	
Socket connector	= PACKARD

